



PLAN

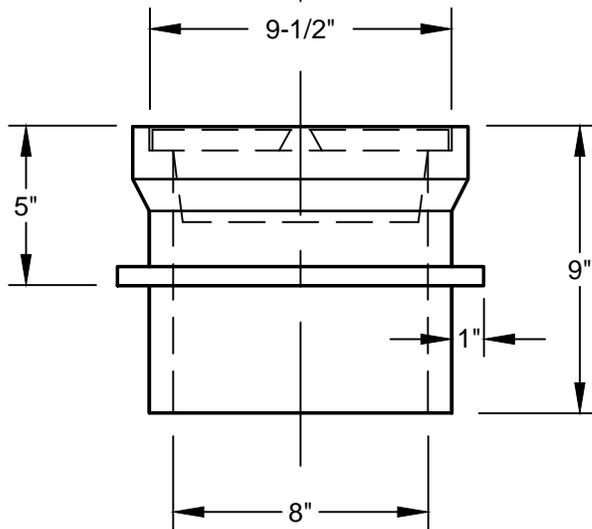

SIDE VIEW

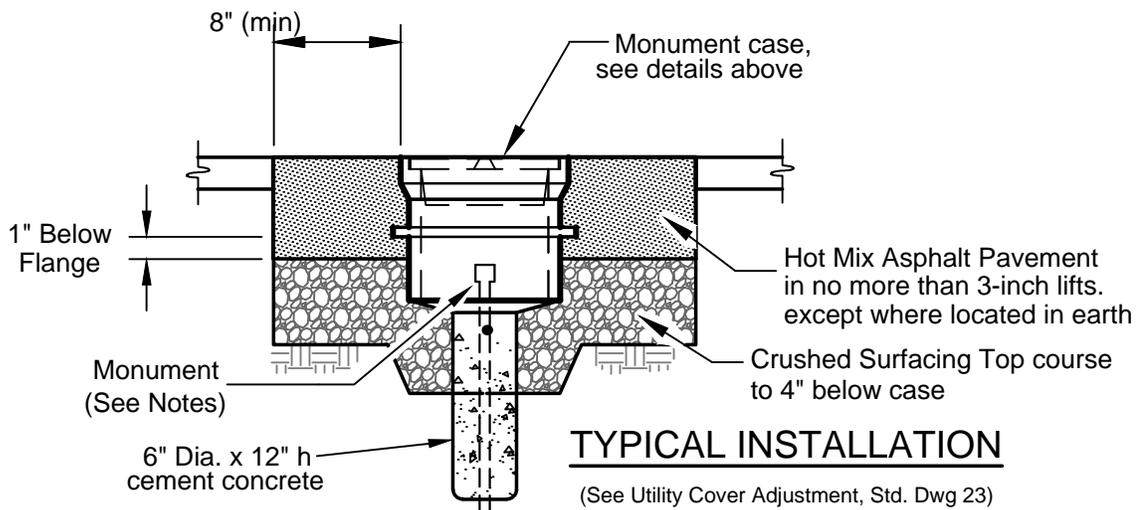

TYPICAL INSTALLATION

(See Utility Cover Adjustment, Std. Dwg 23)

NOTES:

1. Monument case shall be ASTM class 30 grey iron or better.
2. Monument shall be installed in the case by a licensed surveyor after completion of road construction.
3. Monument shall consist of a 5/8-inch diameter by 30-inch long deformed steel bar with a licensed surveyor's top cap and license number, punched or tacked to show center point.
4. Monument case must not touch the pin or concrete. Separate with 2" min. crushed surfacing top course or a sand layer.

MONUMENT DETAILS

PAGE NO:

12